

TYPES OF CONTAINERS

STANDARD OR DRYVAN CONTAINER

20 Feet Standard 20' x 8' x 8'6"

Tare 2300 kg / 5070 lb
 Max. Cargo. 28180 kg/62130 lb
 Max. G.W. 30480 kg/67200 lb

Measures	Internal	Door Opening
Length:	5898 mm / 19'4"	Length: -
Width:	2352 mm / 7'9"	Width: 2340 mm / 7'8"
Height:	2393 mm / 7'10"	Height: 2280 mm / 7'6"

Cub. Capacity 33,2 m3 / 1172 ft3

Description

Available for any normal dry cargo. Example: bags, pallets, boxes, drums, Etc.



40 Feet Standard 40' x 8' x 8'6"

Tare 3750 kg / 8265 lb
 Max. Cargo. 28750 kg / 63385 lb
 Max. G.W. 32500 kg / 71650 lb

Measures	Internal	Door Opening
Length:	12032 mm / 39'6"	-
Width:	2352 mm / 7'9"	2340 mm / 7'8"
Height:	2393 mm / 7'10"	2280 mm / 7'6"

Cub. Capacity 67,7 m3 / 2390 ft3

Description

Available for any normal dry cargo. Example: bags, pallets, boxes, drums, Etc.



40 Feet High Cube 40' x 8' x 9'6"

Tare 3940 kg / 8685 lb
 Max. Cargo. 28560 kg / 62965 lb
 Max. G.W. 32500 kg / 71650 lb

Measures	Internal	Door Opening
Length:	12032 mm / 39'6"	-
Width:	2352 mm / 7'9"	2340 mm / 7'8"
Height:	2698 mm / 8'10"	2585 mm / 8'6"

Cub. Capacity 76,4 m3 / 2700 ft3

Description

Special for bulk cargo. Example: Tobacco, coal.



INTEGRAL REFRIGERATED CONTAINER OR REEFER

20 Feet 20' x 8' x 8'6"

Tare	3080 kg / 6790 lb
Max. Cargo.	27400 kg / 60410 lb
Max. G.W.	30480 kg / 67200 lb

Measures	Internal	Door Opening
Length:	5444 mm / 17'10"	-
Width:	2268 mm / 7'5"	2276 mm / 7'5"
Height:	2272 mm / 7'5"	2261 mm / 7'5"

Cub. Capacity 28,1 m3 / 992 ft3

Description

With own refrigeration unit. Designed for cargo transportation requiring constant temperatures below zero degrees. Example: meat, fish, fruits, etc.



40 Feet 40' x 8' x 8'6"

Tare	4800 kg / 10580 lb
Max. Cargo.	27700 kg / 61070 lb
Max. G.W.	32500 kg / 71650 lb

Measures	Internal	Door Opening
Length:	11561 mm / 37'11"	-
Width:	2280 mm / 7'5"	2280 mm / 7'5"
Height:	2249 mm / 7'5"	2205 mm / 7'3"

Cub. Capacity 59,3 m3 / 2075 ft3

Description

With own refrigeration unit. Designed for cargo transportation requiring constant temperatures below zero degrees. Example: meat, fish, fruits, etc



40 Feet High cube 40' x 8' x 9'6"

Tare	4850 kg / 10690 lb
Max. Cargo.	29150 kg / 64270 lb
Max. G.W.	34000 kg / 74960 lb

Measures	Internal	Door Opening
Length:	11561 mm / 37'11"	-
Width:	2268 mm / 7'5"	2276 mm / 7'5"
Height:	2553 mm / 8'4"	2501 mm / 8'2"

Cub. Capacity 67 m3 / 2366 ft3

Description



INSULATED PHORTOLE OR CONAIR CONTAINER

20 Pies Reefer Conair 20' x 8' x 8'

Tare	2650 kg / 5840 lb
Max. Cargo.	21350 kg / 47070 lb
Max. G.W.	24000 kg / 52910 lb

Measures	Internal	Door Opening
Length:	5750 mm / 18'10"	-
Width:	2260 mm / 7'5"	2271 mm / 7'5"
Height:	2110 mm / 6'11"	2085 mm / 6'10"

Cub. Capacity 27,4 m3 / 970 ft3

Description

Without refrigeration unit. Prepared for cargo transportation requiring constant temperatures. Example: apples, fruits, etc.



20 Feet Reefer Conair 20' x 8' x 8'6"

Tare	2780 kg / 6130 lb
Max. Cargo.	24220 kg / 61070 lb
Max. G.W.	27000 kg / 67200 lb

Measures	Internal	Door Opening
Length:	5444 mm / 17'10"	-
Width:	2300 mm / 7'6"	2300 mm / 7'6"
Height:	2250 mm / 7'5"	2215 mm / 7'4"

Cub. Capacity 29,8 m3 / 1052 ft3

Description

Without refrigeration unit. Prepared for cargo transportation requiring constant temperature. Example: apples, fruits, etc.




Auxiliary Equipment Clip On suitable for Conair type 20' and 40' containers Description

220/240 V.

50/60 Hz, 3 - phase

Cold can be maintained during door to door transportation with this auxiliary equipment.

Description

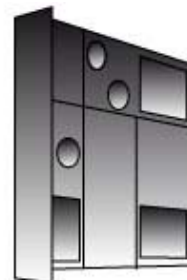

OTHER TYPES OF CONTAINERS

Open top 20 Feet Open top 20' x 8' x 8'6"

Tare	2360 kg / 5200 lb
Max. Cargo.	28120 kg / 62000 lb
Max. G.W.	30480 kg / 67200 lb

Measures	Internal	Door Opening
Length:	5889 mm / 19'4"	-
Width:	2345 mm / 7'9"	2300 mm / 7'8"
Height:	2346 mm / 7'9"	2215 mm / 7'6"

Cub. Capacity	32,4 m3 / 1144 ft3	Roof opening
		Length: 5492 mm / 18'
		Width: 2184 mm / 7'3"

Description

They have a removable canvas roof, specially designed for heavy cargo transportation. These equipments allow superior load and unload Examples: heavy machines, marble plates, etc.



Open top 40 Feet Open top 40' x 8' x 8'6"

Tare	2360 kg / 5200 lb
Max. Cargo.	30140 kg / 66750 lb
Max. G.W.	32500 kg / 71650 lb

Measures	Internal	Door Opening
Length:	12024 mm / 39'6"	-
Width:	2352 mm / 7'9"	2340 mm / 7'8"
Height:	2324 mm / 7'7"	2244 mm / 7'6"

Cub. Capacity	65,7 m3 / 2320 ft3	Roof opening
		Length: 11874 mm / 38'11"
		Width: 2184 mm / 7'3"

Description

They have a removable canvas roof, specially designed for heavy cargo transportation. These equipments allow superior load and unload Examples: heavy machines, marble plates, etc.



Flat Rack fixed type not collapsible 20 y 40' Feet Flat Rack 20' /40'x 8' x 8'6"


20' flat	40' flat
----------	----------

Tare	4030 kg / 8880 lb	5000 kg / 8880 lb
Max. Cargo.	28470 kg / 62770 lb	40000 kg / 90300 lb
Max. G.W.	32500 kg / 71650 lb	45000 kg / 99180 lb

Measures	Internal:	Internal:
Length:	5940 mm / 19'6"	12132 mm / 39'9"
Width:	2345 mm / 7'8"	2400 mm / 7'10"
Height:	2346 mm / 7'8"	2135 mm / 7'.

Description

With fixed or collapsible walls, with no laterals. Designed for the over dimension cargo transportation. Example: machines, etc.

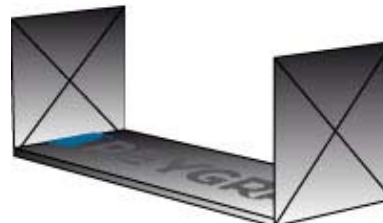

Dry Bulk Container 20´

Description

With superior hatches and unload by precipitation. Specially coated they allow grain transportation Example: malt, seeds, etc.



Tank Container 20´and 40´

Description

There are multiple applications and designs for these type of containers. They may be coated for corrosive chemical products transportation or for oils or wines cargo. These equipments may be available with heating for other special cargoes.



Platform Container 20´and 40´

Description

Designed for over dimension or over weight cargo transportation. Example: Rolling machinery, etc.

